

Hebei Huazheng Heavy Industry Machinery and Equipment Co., Ltd.

Address：Jingxiu District, Baoding City, Hebei Province，China

Tel：+86 19912176362、+86 13383260970、+86 17772529602

E-mail：sales05@hzheavy.com、sales06@hzheavy.com、sales07@hzheavy.com

Electric Pallet Truck Series

Efficient Pallet Handling Solutions

HZHI®



Hebei Huazheng Heavy Industry Machinery and Equipment Co., Ltd.

Pursue Excellent Quality Create a World-Class Brand

ABOUT US



Hebei Huazheng Heavy Industry Machinery Co., Ltd. is based in Baoding, Hebei Province – a key production hub for China's material handling industry.

Hebei Huazheng Heavy Industry Machinery Co., Ltd.

As a subsidiary of Huazheng Group, we draw on the Group's extensive global market expertise and customer network, with products exported to countries and regions across the world.
We believe our value is twofold:
a risk buffer for manufacturers,
and a professional link for material handling clients.

30 Years of International Trade Expertise

Built a professional global marketing network and efficient supply chain integration system.
Possess robust international trade compliance capabilities and a complete global after-sales service system.
Deeply rooted in the complex, high-value heavy machinery sector, delivering sustained core value

Mature Supply Chain Management Capabilities

Deeply engaged in full industrial chain collaboration, far exceeding simple supply-demand matching.
Leveraging the cluster advantages of Hebei's "One Zone, Multiple Parks" layout, we innovate the Shared Intelligent Manufacturing model.
Providing customers with stable, efficient and low-risk supply chain assurance

Market Insight Resource Enablement

Delivering all-round support to China's high-quality manufacturers in the material handling sector
International market trend analysis
Marketing system development
Service capability upgrading
Empowering enterprises to seize growth opportunities in segmented fields including intelligent lifting equipment, new energy forklifts and explosion-proof equipment

Core Business

We focus on the R&D, manufacturing and sales of material handling equipment, with product applications covering full scenarios such as industrial manufacturing and logistics & warehousing.
Supported by the Group's financial strength, global marketing network and technical platform, we have become a key enterprise in the lifting and transportation machinery industry.

Our Strengths

Founder Profile—David

Hebei Huazheng Heavy Industry Machinery Equipment Co., Ltd.—**Chairman**
Baoding Huazheng Electric Manufacturing Co., Ltd.—**Chairman**
Beijing Huazheng Technology Co., Ltd.—**Chairman**
Hebei Huanhai Import & Export Trading Co., Ltd.—**Chairman**
Hebei Xiong'an Jianweixing Enterprise Management Partnership (Limited Partnership)—**Executive Partner**
Baoding Wujie Yungu Venture Incubator Service Co., Ltd.—**Chairman**
Baoding Baozhou E-Commerce Chamber of Commerce—**Co-Founder & President**
The 6th Alibaba Chenggong Camp—**Camp Commander**
Alibaba—**Gold Medal Lecturer**
Expert in Foreign Trade Enterprise Transformation
13 Years of Practical Experience in Cross-Border Business



Certificates



Brand Honors & Our Credentials











01

手动搬运车-AF款
Manual handling vehicle - AF model

产品特点：
1、锻打摇臂，加装铜套（提升强度、耐磨度、重载不变形）
2、整体油缸（加粗活塞杆，起升更省力）
3、高档手柄（握感舒适，防滑，加厚耐用）
4、实心拉杆（重载不变形）

Product features:
1、Forging rocker arms and installing copper sleeves (to enhance strength, wear resistance, and prevent deformation under heavy loads)
2、Integral oil cylinder (with thicker piston rod for easier lifting)
3、High end handle (comfortable grip, anti slip, thick and durable)
4、Solid rod (no deformation under heavy load)




实心拉杆Solid rod
重载不变形
no deformation under heavy load)


锻打摇臂Forging rocker arm
提升强度、耐磨度，重载不变形
Enhance strength, wear resistance, and prevent deformation under heavy loads


整体油缸Integrated oil cylinder
加粗活塞杆，起升更省力
Thickened piston rod for easier lifting

技术参数 | TECHNICAL PARAMETERS

型号model	单位unit			
额定载重rated load	Kg	2000	3000	5000
降低时高度Height during descent	mm	85	85	85
大轮尺寸Large wheel size	mm	Φ180*50	Φ180*50	Φ180*50
承重轮尺寸Bearing wheel size	mm	Φ80*70	Φ80*70	Φ80*66
总体高度Overall height	mm	1224	1224	1224
总体长度overall length	mm	1533/1603	1533/1603	1533/1603
货叉长度FORK LENGTH	mm	1150/1220	1150/1220	1150/1220
货叉外宽Fork outer width	mm	550/685	550/685	550/685
自重weight	Kg	78/80	82/84	114/120

PRODUCT DISPIAY 产品展示

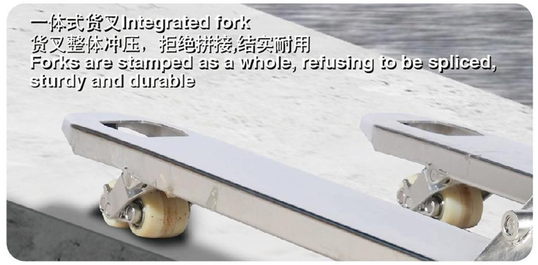
不锈钢手动搬运车
Stainless steel manual handling vehicle

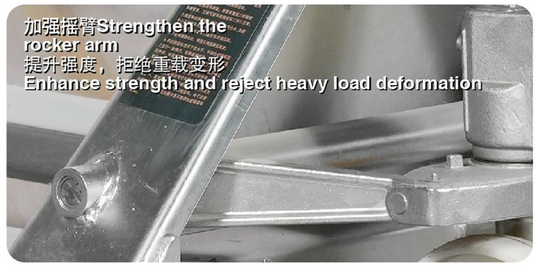
产品特点：
1、整体不锈钢304材质（电解抛光，防腐耐用，承载不变形）
2、一体式货叉（货叉整体冲压，拒绝拼接,结实耐用）
3、加强摇臂（提升强度，拒绝重载变形）
4、一体不锈钢油缸（整体不锈钢泵，液压集成一体式设计，内置进口密封圈，密封设计防漏可靠）

Product features:
1、Overall stainless steel 304 material (electrolytic polishing, anti-corrosion and durable, bearing without deformation)
2、Integrated fork (fork stamped as a whole, refusing to be spliced, sturdy and durable)
3、Strengthen the rocker arm (increase strength, reject heavy load deformation)
4、Integrated stainless steel oil cylinder (integrated stainless steel pump, hydraulic integrated design,Built in imported sealing ring, sealing design is leak proof and reliable



舒适把手 Comfortable Grip
耐磨防滑 Wear resistant and slip resistant
加固加厚 Strengthening and thickening
不漏油 No oil leakage
加厚货叉 Thick fork
加粗弹簧 Bold spring


一体式货叉Integrated fork
货叉整体冲压，拒绝拼接,结实耐用
Forks are stamped as a whole, refusing to be spliced, sturdy and durable


加强摇臂Strengthen the rocker arm
提升强度，拒绝重载变形
Enhance strength and reject heavy load deformation


一体不锈钢油缸Integrated stainless steel oil cylinder
整体不锈钢泵，液压集成一体式设计，内置进口密封圈，密封设计防漏可靠
Integral stainless steel pump, hydraulic integrated design, built-in imported sealing ring, sealing design leak proof and reliable

技术参数 | TECHNICAL PARAMETERS

型号model	单位unit	
额定载重rated load	Kg	3000
降低时高度Height during descent	mm	85
大轮尺寸Large wheel size	mm	Φ180*50
承重轮尺寸Bearing wheel size	mm	Φ80*70
总体高度Overall height	mm	1215
总体长度overall length	mm	1560/1603
货叉长度FORK LENGTH	mm	1150/1220
货叉外宽Fork outer width	mm	550/685
自重weight	Kg	76/80

电子秤手动搬运车
Electronic scale manual handling vehicle

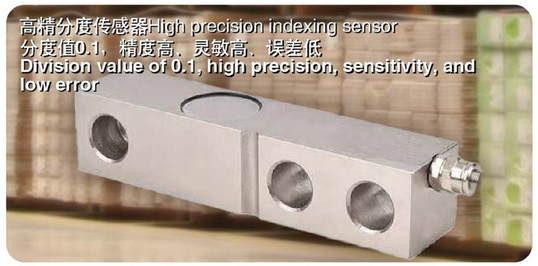
产品特点：
1、整体油缸（进口阀芯，密封性好，加粗精钢弹簧，回弹更快效率更高）
2、IP66级表头（高防水、高防尘、高防撞）
3、高精分度传感器（分度值0.1，精度高、灵敏高、误差低）
4、高强度锰钢车架（加厚、防撞、不变形）

Product features:
1、Integrated oil cylinder (imported valve core, good sealing. Bold and refined steel spring, faster rebound and higher efficiency)
2、IP66 level header (high waterproof, high dustproof, high anti–collision)
3、High precision indexing sensor (with an indexing value of 0.1, high accuracy, sensitivity, and low error)
4、High strength manganese steel frame (thickened, anti–collision, non deformed)





IP66级表头IP66 level meter head
高防水、高防尘、高防撞
High waterproof, high dustproof, high anti-collision


高精分度传感器High precision indexing sensor
分度值0.1，精度高，灵敏高，误差低
Division value of 0.1, high precision, sensitivity, and low error


整体油缸Integrated oil cylinder
进口阀芯，密封性好，加粗精钢弹簧，回弹更快效率更高
Imported valve core with good sealing performance, Bold stainless steel spring, rebound Faster and more efficient

技术参数 | TECHNICAL PARAMETERS

型号model	单位unit		
额定载重rated load	Kg	2000	3000
降低时高度Height during descent	mm	85	85
大轮尺寸Large wheel size	mm	Φ180*50	Φ180*50
承重轮尺寸Bearing wheel size	mm	Φ80*70	Φ80*70
总体高度Overall height	mm	1224	1224
总体长度overall length	mm	1533/1603	1533/1603
货叉长度FORK LENGTH	mm	1150	1150
货叉外宽Fork outer width	mm	550/685	550/685
称重表头电池电压/容量 Weighing meter head battery voltage/capacity	内置 built-in	7.4V/10000mAh	7.4V/10000mAh
称重误差（分度值）Weighing error (division value)		0.1	0.1
自重weight	Kg	104/107	104/107

PRODUCT DISPIAY 产品展示

全电动搬运车SL20
Fully electric transport vehicle SL20

产品特点：
1、电磁刹车（防止重载溜坡）
2、可拆卸电池包（6秒快速更换）
3、智能操作手柄（可快慢速自由切换，紧急反向）
4、强劲动力（0.9千瓦驱动电机）

Product features:
1、Electromagnetic braking (to prevent heavy loads from rolling downhill)
2、Detachable battery pack (quick replacement in 6 seconds)
3、Intelligent joystick (can switch between fast and slow speeds freely, emergency reverse)
4、Strong power (0.9 kW drive motor)



舒适把手 Comfortable Grip
耐磨防滑 Wear resistant and slip resistant
加固加厚 Strengthening and thickening
不漏油 No oil leakage
加厚货叉 Thick fork
大容量电池 High capacity battery



可拆卸电池
Detachable battery pack
6秒快速更换
6-second quick replacement


智能操作手柄
Intelligent operation handle
可快慢速自由切换，紧急反向
Free switching between fast and slow speeds, emergency reverse


电磁刹车Brake
防止重载溜坡
Prevent overloading and slope sliding

技术参数 | TECHNICAL PARAMETERS

	产品型号PRODUCT MODEL	单位unit	CBD15SL	CBD20SL
特 性 characteristic	驱动方式Drive mode		电动 electric	电动 electric
	操作类型Operation type		步行式 Walking style	步行式 Walking style
	载荷load	Kg	1500	2000
	重量含蓄电池Weight reserved battery	Kg	139	142
基本尺寸 Basic dimensions	整车长度Vehicle length	mm	1650	1650
	整车宽度Vehicle width	mm	550/685	550/685
	整车高度Vehicle height	mm	1200	1200
	起升高度Lift Height	mm	195	195
	货叉尺寸Fork size	mm	56/160/1150	56/160/1150
	货叉外宽Fork outer width	mm	550/685	550/685
	轮子类型wheel type		PU/PU聚氨酯 PU/PU polyurethane	PU/PU聚氨酯 PU/PU polyurethane
	驱动轮尺寸Drive wheel size		Φ210*80	Φ210*80
	承重轮尺寸Bearing wheel size		4*Φ80*70	4*Φ80*70
性 能 Performance	行走速度 满载 / 空载Walking speed with full load/empty load	Km/h	4/5	4/5
	爬坡度 满载 / 空载Climbing degree with full load/empty load	%	3/5	3/5
	制动方式Braking method		电磁制动 Electromagnetic braking	电磁制动 Electromagnetic braking
	驱动电机功率Drive motor power	Kw	0.75	0.9
	起升电机功率Power of lifting motor	kw	0.8	0.8
驱 动 Drive	蓄电池电压/容量Battery voltage/capacity	V/Ah	24V20Ah	24V20Ah
	蓄电池重量Weight of battery	kg	5.3	5.3
	蓄电池尺寸长/宽/高Battery size: length/width/height	mm	3600/360/100	3600/360/100
	蓄电池类型Battery type		锂电Lithium battery	锂电Lithium battery
其 他other	驱动控制类型Drive control type		直流direct	直流direct

PRODUCT DISPIAY 产品展示

全电动搬运车SQ20

All electric transport vehicle SQ20

产品特点：

1、可快速更换电池（48V12Ah铅酸免维护电池）

2、电磁刹车（防止重载溜坡）

3、智能操作手柄（快慢速自由切换，紧急反向）

Product features:

1、Quick battery replacement (48V12Ah maintenance free lead-acid battery)

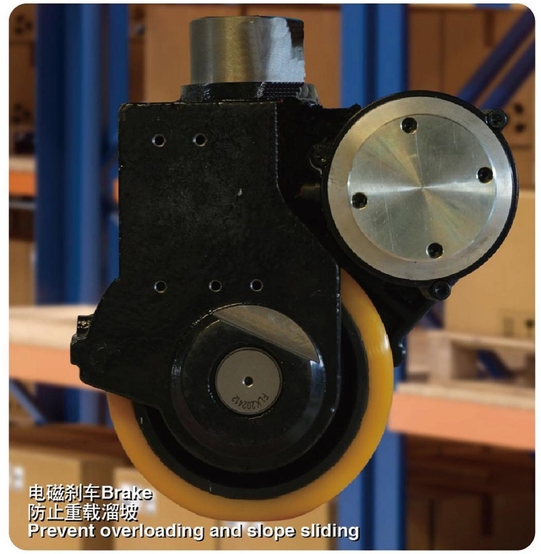
2、Electromagnetic braking (to prevent heavy loads from rolling downhill)

3、Intelligent operation handle, (fast and slow speed can be freely switched, emergency reverse)









技术参数 | TECHNICAL PARAMETERS

	产品型号PRODUCT MODEL	单位unit	CBD15SQ	CBD20SQ
特性 characteristic	驱动方式Drive mode		电动electric	电动electric
	操作类型Operation type		步行式Walking style	步行式Walking style
	载荷load	Kg	1500	2000
	重量含蓄电池Weight reserved battery	Kg	143	147
基本尺寸 Basic dimensions	整车长度Vehicle length	mm	1650	1650
	整车宽度Vehicle width	mm	550/685	550/685
	整车高度Vehicle height	mm	1200	1200
	起升高度lifting height	mm	195	195
	货叉尺寸Minimum height of fork	mm	56/160/1150	56/160/1150
	货叉外宽Fork outer width	mm	550/685	550/685
	轮子类型wheel type		PU/PU聚氨酯PU/PU polyurethane	PU/PU聚氨酯PU/PU polyurethane
	驱动轮尺寸Drive wheel size		Φ210*80	Φ210*80
	承载轮尺寸Bearing wheel size		4*Φ80*70	4*Φ80*70
性能 Performance	行走速度满载/空载Walking speed with full load/empty load	m/s	4/4.5	4/4.5
	爬坡度满载/空载Climbing degree with full load/empty load	km/h	3/5	3/5
	制动方式Braking method		电磁制动Electromagnetic braking	电磁制动Electromagnetic braking
	驱动电机功率Drive motor power	Kw	0.75	1
	起升电机功率Power of lifting motor		0.8	0.8
驱动 Drive	蓄电池电压/容量Battery voltage/capacity	V/Ah	48V/12Ah	48V/12Ah
	蓄电池重量Weight of battery	kg	21	21
	蓄电池尺寸长/宽/高 Battery size: length/width/height	mm	370/105/335	370/105/335
	蓄电池类型Battery type		铅酸Lead acid	铅酸Lead acid
其他other	驱动控制类型Drive control type		直流无刷dc brushless	直流无刷dc brushless

PRODUCT DISPIAY 产品展示

全电动搬运车FL15

Fully electric transport vehicle FL15

产品特点：

1、电磁刹车（防止重载溜坡）

2、可快速更换电池（6秒快速更换）

3、48V750W无刷电机（免维护驱动电机）

4、智能操作手柄（快慢速自由切换，紧急反向）

Product features:

1、Electromagnetic brake (to prevent heavy load sliding)

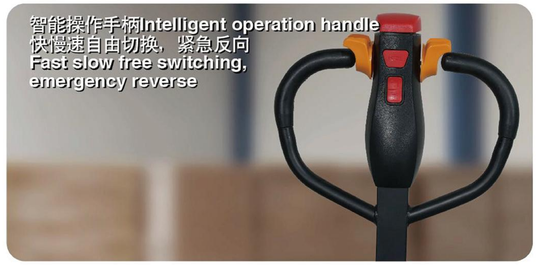
2、Quick battery replacement (6–second quick replacement)

3、48V750W brushless motor (maintenance free drive motor)

4、Intelligent operation handle (fast and slow speed can be freely switched, emergency reverse)













技术参数 | TECHNICAL PARAMETERS

	产品型号PRODUCT MODEL	单位unit	CBD15FL	CBD20FL
特 性 characteristic	驱动方式Drive mode		电动electric	电动electric
	操作类型Operation type		步行式Walking style	步行式Walking style
	载荷load	Kg	1500	2000
	重量含蓄电池Weight reserved battery	Kg	115.5	117.5
基本尺寸 Basic dimensions	整车长度Vehicle length	mm	1600	1600
	整车宽度Vehicle width	mm	550/685	550/685
	整车高度Vehicle height	mm	1200	1200
	起升高度Lift Height	mm	195	195
	货叉尺寸Fork size	mm	56/160/1150	56/160/1150
	货叉外宽Fork outer width	mm	550/685	550/685
	轮子类型wheel type		PU/PU聚氨酯PU/PU polyurethane	PU/PU聚氨酯PU/PU polyurethane
	驱动轮尺寸Drive wheel size		Φ160*50	Φ160*50
	承载轮尺寸Bearing wheel size		4*Φ80*70	4*Φ80*70
性 能 Performance	行走速度满载/空载Walking speed with full load/empty load	Km/h	4/5	4/5
	爬坡度满载/空载Climbing degree with full load/empty load	%	3/5	3/5
	制动方式Braking method		电磁制动Electromagnetic braking	电磁制动Electromagnetic braking
	驱动电机功率Drive motor power	Kw	0.75	1
	起升电机功率Power of lifting motor	kw	0.5	0.8
驱 动 Drive	蓄电池电压/容量Battery voltage/capacity	V/Ah	48V10Ah	48V15Ah
	蓄电池重量Weight of battery	kg	4.3	5.1
	蓄电池尺寸长/宽/高Battery size: length/width/height	mm	210/173/85	210/173/85
	蓄电池类型Battery type		锂电Lithium battery	锂电Lithium battery
其 他other	驱动控制类型Drive control type		直流无刷dc brushless	直流无刷dc brushless

PRODUCT DISPIAY 产品展示

纸筒全电动搬运车WQ20-Z

Paper tube fully electric transport vehicle WQ20-Z

产品特点：

1、强劲动力（1.0千瓦驱动电机）

2、独立的泵站（起升动力强劲，性能安全稳定）

3、电磁刹车（防止重载溜坡）

4、智能操作手柄（快慢速自由切换，紧急反向）

Product features:

1、Strong power (1.0 kW drive motor)

2、Independent pump station (strong lifting power, safe and stable performance)

3、Electromagnetic brake (to prevent heavy load from rolling downhill)

4、Intelligent operation handle (fast and slow speed can be freely switched, emergency reverse)









技术参数 | TECHNICAL PARAMETERS

	产品型号PRODUCT MODEL	单位unit	CBD20WQ-Z
特 性 characteristic	驱动方式Drive mode		电动electric
	操作类型Operation type		步行式Walking style
	载荷load	Kg	2000
	重量含蓄电池Weight reserved battery	Kg	177
基本尺寸 Basic dimensions	整车长度Vehicle length	mm	1650
	整车宽度Vehicle width	mm	550/685
	整车高度Vehicle height	mm	1250
	起升高度Lift Height	mm	200
	货叉尺寸Fork size	mm	56/160/1150
	货叉外宽Fork outer width	mm	550/685
	轮子类型wheel type		PU/PU聚氨酯PU/PU polyurethane
	驱动轮尺寸Drive wheel size		Φ210*75
	承载轮尺寸Bearing wheel size		4*Φ80*70
性 能 Performance	行走速度 满载/空载Walking speed with full load/empty load	Km/h	3.5/4
	爬坡度 满载/空载Climbing degree with full load/empty load	%	6/10
	制动方式Braking method		电磁制动Electromagnetic braking
	驱动电机功率Drive motor power	Kw	1
	起升电机功率Power of lifting motor	kw	0.8
驱 动 Drive	蓄电池电压/容量Battery voltage/capacity	V/Ah	4*12/20
	蓄电池重量Weight of battery	kg	24.5
	蓄电池尺寸长/宽/高Battery size: length/width/height	mm	317/191/202
	蓄电池类型Battery type		铅酸免维护Lead acid maintenance free
其 他 other	驱动控制类型Drive control type		直流无刷dc brushless

PRODUCT DISPIAY 产品展示

越野全电动搬运车YQL30
Off road all electric transport vehicle YQL30

产品特点：

1、350mm直径防滑驱动轮（一体注胶轮胎，通过性强、更耐磨）

2、电磁刹车（防止重载溜坡）

3、48V1200W超强动力驱动（大扭矩爬坡更强）

4、智能操作手柄（快慢速自由切换，紧急反向）

Product features:

1、350mm diameter anti slip drive wheel (integrated rubber tire, strong passability, more wear–resistant)

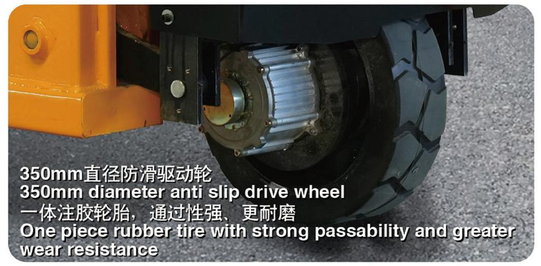
2、Electromagnetic brake (to prevent heavy load sliding)

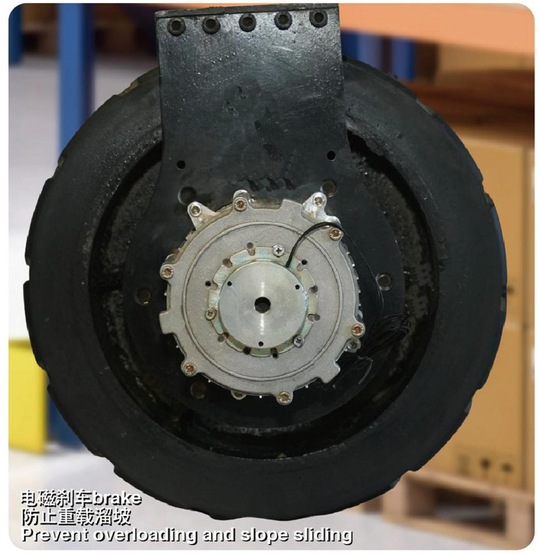
3、48V1200W ultra strong power drive (stronger climbing ability with high torque)

4、Intelligent operation handle (fast and slow speed can be freely switched, emergency reverse)




智能操作手柄Intelligent operation handle
快慢速自由切换，紧急反向
Fast slow free switching, emergency reverse


350mm直径防滑驱动轮
350mm diameter anti slip drive wheel
一体注胶轮胎，通过性强、更耐磨
One piece rubber tire with strong passability and greater wear resistance


电磁刹车brake
防止重载溜坡
Prevent overloading and slope sliding

技术参数 | TECHNICAL PARAMETERS

	产品型号PRODUCT MODEL	单位	CBD30YQL
特性 characteristic	驱动方式Drive mode		电动electric
	操作类型Operation type		步行式Walking style
	载荷load	Kg	3000
	重量含蓄电池Weight reserved battery	Kg	226.5
基本尺寸 Basic dimensions	整车长度Vehicle length	mm	1650
	整车宽度Vehicle width	mm	550/685
	整车高度Vehicle height	mm	1270
	起升高度Lift Height	mm	200
	货叉尺寸Fork size	mm	56/160/1200
	货叉外宽Fork outer width	mm	550/685
	轮子类型wheel type		注胶及PU轮Glue injection and PU wheels
	驱动轮尺寸Drive wheel size		Φ350*100
	承载轮尺寸Bearing wheel size		4*Φ80*70
性能 Performance	行走速度 满载/空载Walking speed with full load/empty load	Km/h	4/5
	爬坡度 满载/空载Climbing degree with full load/empty load	%	6/10
	制动方式Braking method		电磁制动Electromagnetic braking
	驱动电机功率Drive motor power	Kw	1.2
	起升电机功率Power of lifting motor	kw	0.8
驱动 Drive	蓄电池电压/容量Battery voltage/capacity	V/Ah	48/32
	蓄电池重量Weight of battery	kg	36.4
	蓄电池尺寸长/宽/高Battery size: length/width/height	mm	320/278/208
	蓄电池类型Battery type		铅酸免维护Lead acid maintenance free
其他 other	驱动控制类型Drive control type		直流无刷dc brushless

PRODUCT DISPIAY 产品展示

全电动搬运车 AQ30

All electric transport vehicle AQ30

产品特点：

1、48V800W无刷电机（免维护驱动电机）

2、智能操作手柄（电动升降、电动行走、紧急反向）

3、上市品牌铅酸电池（48V20Ah免维护电池）

4、PU静音轮（不伤地面，双轮承载更稳定）

Product features:

1、48V800W brushless motor (maintenance free drive motor)

2、Intelligent operation handle (fast and slow speed can be freely switched, emergency reverse)

3、Listed brand lead–acid battery (48V20Ah maintenance free battery)

4、PU silent wheel (does not damage the ground, dual wheel bearing is more stable)









技术参数 | TECHNICAL PARAMETERS

	产品型号PRODUCT MODEL	单位unit	CBD30AQ
特性 characteristic	驱动方式Drive mode		电动electric
	操作类型Operation type		步行式Walking style
	载荷load	Kg	3000
	重量含蓄电池Weight reserved battery	Kg	157
基本尺寸 Basic dimensions	整车长度Vehicle length	mm	1680
	整车宽度Vehicle width	mm	550/685
	整车高度Vehicle height	mm	1220
	起升高度Lift Height	mm	195
	货叉尺寸Fork size	mm	56/160/1150
	货叉外宽Fork outer width	mm	550/685
	轮子类型wheel type		PU/PU聚氨酯PU/PU polyurethane
	驱动轮尺寸Drive wheel size		Φ160*50
	承载轮尺寸Bearing wheel size		4*Φ80*70
性能 Performance	行走速度满载/空载Walking speed with full load/empty load	Km/h	4/4.5
	爬坡度满载/空载Climbing degree with full load/empty load	%	6/10
	制动方式Braking method		励磁制动Excitation braking
	驱动电机功率Drive motor power	Kw	0.8
	起升电机功率Power of lifting motor	kw	0.8
驱动 Drive	蓄电池电压/容量Battery voltage/capacity	V/Ah	48V20Ah
	蓄电也重量Weight of battery	kg	24
	蓄电池尺寸长/宽/高Battery size: length/width/height	mm	317/191/202
	蓄电池类型Battery type		铅酸免维护Lead acid maintenance free
其他other	驱动控制类型Drive control type		直流无刷dc brushless

PRODUCT DISPIAY 产品展示

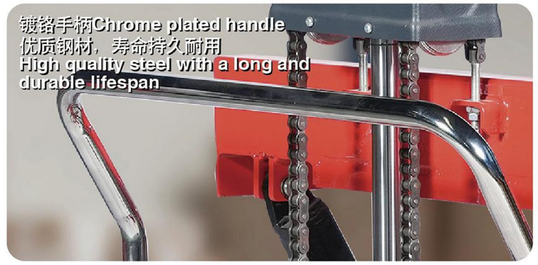
移动式手动高起升搬运车
Mobile manual high lift truck

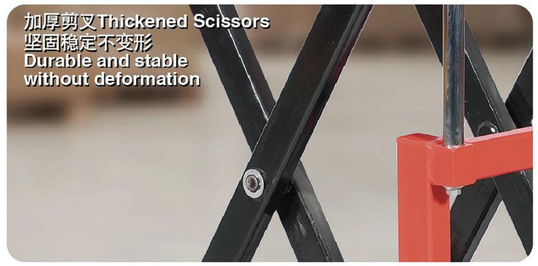
产品特点：
1、镀铬手柄 （优质钢材，寿命持久耐用）
2、加厚剪叉（坚固稳定不变形）
3、整体密封油缸（一体油缸升降更省力不漏油 使用寿命更长更耐用）

Product features:
1、Chrome plated handle (made of high–quality steel, with a long–lasting and durable lifespan)
2、Thickened scissor (sturdy, stable, and not deformed)
3、Integrated sealed oil cylinder (the lifting and lowering of the integrated oil cylinder is more effortless and does not leak oil) Longer and more durable lifespan











技术参数 | TECHNICAL PARAMETERS

型号model	单位unit	EGS1000-550	EGS1000-685
额定载重rated load	kg	1000	1000
最低高度Minimum height	mm	85	85
最高高度Height	mm	850	850
货叉叉长Fork length	mm	1150	1150
货叉宽度Fork width	mm	550	685
总长度Total length	mm	1675	1675
总高度Total height	mm	1100	1100
自重weight	Kg	141	147

PRODUCT DISPIAY 产品展示

移动式半电动高起升搬运车
Mobile semi electric high lift truck

产品特点：
1、电动升降（48V12Ah锂电，电动控制起升下降）
2、加厚剪叉（坚固稳定、不变形）
3、整体密封油缸（一体油缸升降更省力不漏油 使用寿命更长更耐用
Product features:
1、Electric lifting (48V12Ah lithium battery, electrically controlled lifting and lowering)
2、Thickened scissor (sturdy, stable, and not deformed)
3、Integrated sealed oil cylinder (the lifting and lowering of the integrated oil cylinder is more effortless and does not leak oil) Longer and more durable lifespan









技术参数 | TECHNICAL PARAMETERS

型号model	单位unit	EGSL1000 -550	EGSL1000-685
额定载荷rated load	KG	1000	1000
最低高度Minimum height	mm	85	85
最高高度Height	mm	850	850
货叉叉长Fork length	mm	1150	1150
货叉宽度Fork width	mm	550	685
总长度Total length	mm	1675	1675
总高度Total height	mm	1100	1100
自重weight	KG	141	147
电池类型battery type		锂电池(48V12Ah)Lithium battery (48V12Ah)	

PRODUCT DISPIAY 产品展示

剪叉式手动高起升搬运车
Scissor type manual high lift truck

产品特点：
1、双级油缸设计
2、双速泵芯设计（300 公斤以下快速起升，300 公斤以上慢速省力起升，效率与操作舒适相统一）
3、加厚剪叉（抗弯曲不变形）
4、PU 静音轮（噪音小，不伤地面、承载更强）

Product features:
1、Dual stage oil cylinder design
2、Dual speed pump core design (fast lifting below 300 kg, slow and effortless lifting above 300 kg, combining efficiency with comfortable operation)
3、Thickened scissor (resistant to bending and deformation)
4、PU silent wheel (with low noise, no damage to the ground, and stronger load-bearing capacity)




加厚剪叉Thickened Scissors
抗弯曲不变形Anti bending and non deformation


PU 静音轮PU silent wheel
噪音小，不伤地面，承载更强
Low noise, no damage to the ground, stronger load-bearing capacity



双速泵芯设计Dual speed pump core design
300 公斤以下快速起升，300 公斤以上慢速省力起升，效率与操作舒适相统一quick lifting below 300 kg, over 300 kg Slow and effortless lifting, combining efficiency with comfortable operation

技术参数 | TECHNICAL PARAMETERS

型号model	单位unit	JGS15-550	JGS15-685
规格specifications	mm	550	685
额定载重rated load	Kg	1500	1500
货叉降低时高度Height when the fork is lowered	mm	85	85
最大起升高度Maximum lifting height	mm	800	800
轮子类型wheel type		PU/聚氨酯/PU/Polyurethane	PU/聚氨酯/PU/Polyurethane
大轮尺寸Large wheel size	mn	180*50	180*50
承重轮尺寸Bearing wheel size	mm	70*50	70*50
整车高度Vehicle height	mm	1365	1365
总体长度overall length	mm	1580	1580
货叉长度FORK LENGTH	mm	1150	1150
货叉外宽Fork outer width	mm	550	685
单个货叉宽度Single fork width	mm	160	160
自重weight	Kg	123	129

PRODUCT DISPIAY 产品展示

半电动高起升搬运车（红外感应款）
Semi electric high lift truck (infrared induction model)

产品特点：
1、电动调节（电动上升、电动下降）
2、红外感应控制升降（光电感应、自动升降）
3、一体油泵设计（起升平稳、轻松）
4、电瓶、电器件不随车起升（能效高、节能环保）

Product features:
1、Electric adjustment (electric rise, electric fall)
2、Infrared sensing control for lifting (photoelectric sensing, automatic lifting)
3、Integrated oil pump design (Smooth and easy lifting)
4、The battery and electrical components are not lifted with the vehicle (high energy efficiency, energy-saving and environmentally friendly)




聚氨酯静音轮
Polyurethane silent wheel
噪音小，不伤地面Low noise, does not harm the ground


红外感应Infrared induction
光电感应、自动升降
Photoelectric sensing, automatic lifting and lowering



一体油泵Integrated oil pump
起升平稳、轻松Smooth and easy lifting

技术参数 | TECHNICAL PARAMETERS

型号model	单位unit	JGSLG15-550	JGSLG15-685
规格specifications	mm	550	685
额定载重rated load	Kg	1500	1500
货叉降低时高度Height when the fork is lowered	mm	85	85
最大起升高度Maximum lifting height	mm	800	800
最大起升行程Maximum lifting stroke	mm	>710	>710
轮子类型wheel type		聚氨酯/尼龙Polyurethane/Nylon	聚氨酯/尼龙Polyurethane/Nylon
大轮尺寸Large wheel size	mm	Φ180*50	Φ180*50
承重轮尺寸Bearing wheel size	mm	Φ74 * 55	Φ74 * 55
整车高度Vehicle height	mm	1208	1208
总体长度overall length	mm	1650	1650
货叉长度FORK LENGTH	mm	1150	1150
货叉外宽Fork outer width	mm	550	685
单个货叉宽度Single fork width	mm	160	160
蓄电池类型Battery type		锂电池lithium battery	锂电池lithium battery
蓄电池电压/容量Battery voltage/capacity	V/Ah	48/12	48/12
起升电机功率Battery voltage/capacity	kw	0.8	0.8
自重weight	Kg	149	155

PRODUCT DISPIAY 产品展示

剪叉式全电动高起升搬运车
Scissor type fully electric high lift truck

产品特点：
1、电动调节（电动升降、电动行走）
2、一体油泵设计（双节活塞杆，货叉起升更快）
3、电瓶、电器件不随车起升（能效高、节能环保）

Product features:
1、Electric adjustment (electric lifting, electric walking)
2、Integrated oil pump design (double section piston rod, faster fork lifting)
3、The battery and electrical components are not lifted with the vehicle (high energy efficiency, energy-saving and environmentally friendly)









技术参数 | TECHNICAL PARAMETERS

型号model	单位unit	JGSQQ15-550	JGSQQ15-685
规格specifications	mn	550	685
额定载重rated load	Kg	1500	1500
货叉降低时高度Height when the fork is lowered	mm	85	85
最大起升高度Maximum lifting height	mm	800	800
最大起升行程Maximum lifting stroke	mm	>710	>710
轮子类型wheel type		聚氨酯/尼龙Polyurethane/Nylon	聚氨酯/尼龙Polyurethane/Nylon
大轮尺寸Large wheel size	mm	Φ180*50	Φ180*50
承重轮尺寸Bearing wheel size	mm	Φ74*55	Φ74*55
整车高度Vehicle height	mm	1310	1310
总体长度overall length	mm	1780	1780
货叉长度FORK LENGTH	mm	1150	1150
货叉外宽Fork outer width	mm	550	685
单个货叉宽度Single fork width	mm	160	160
蓄电池类型Battery type		铅酸电池 Lead acid battery	铅酸电池 Lead acid battery
蓄电池电压/容量Battery voltage/capacity	VAh	48/20	48/20
起升电机功率Battery voltage/capacity	kw	0.8	0.8
驱动电机功率Drive motor power	kw	0.8	0.8
自重weight	Kg	192	198

PRODUCT DISPIAY 产品展示

单剪式平台车PTD
Single cut platform vehicle PTD

产品特点：
1、镀铬手柄（手感舒适、坚固耐用）
2、脚踏式起升（起升更轻松）
3、拉线式下降（下降更灵活）
4、加厚剪叉（抗弯曲不变形）
5、加强型油缸（双重油封保护，杜绝漏油，动力更加强劲更稳定）

Product features:
1、Chrome plated handle (comfortable to the touch, sturdy and durable)
2、Foot operated lifting (easier lifting)
3、Pull type descent (more flexible descent)
4、Thickened scissor (resistant to bending and deformation)
5、Enhanced oil cylinder (with dual oil seal protection to prevent oil leakage, providing stronger and more stable power)









技术参数 | TECHNICAL PARAMETERS

型号 Model	单位	PTD150	PTD350	PTD500
额定载荷Rated load model (double shear type)	KG	150	350	500
平台最低高度Minimum platform height	mm	220	290	290
平台起升后最高度Maximum height after platform lifting	mm	720	900	900
平台尺寸Platform size	mm	700*450*36	815*500*50	815*500*50
子轮尺寸Sub wheel size	mm	φ100*30	φ125*50	φ125*50
手柄离地高度Ground clearance height of handle	mm	820	960	990
平台起升至最高油泵压次数 Number of times the platform is raised to the maximum oil pump pressure	次	< 26	< 35	< 35
自重weight	kg	39	70	74

PRODUCT DISPIAY 产品展示